


Specifications

Model		U30-6
Bucket capacity	m ³	0.10
Std. bucket width: (with/without cutting blade)	mm	570 / 520
Machine weight (rubber/steel crawler)	kg	3030 / 3120
Operating weight (Including operator weight: 75kg) (rubber/steel crawler)	kg	3105 / 3195
Dimensions (In transport condition)	Overall length	mm 4530
	Overall height	mm 2455
	Overall width	mm 1550
	Min. ground clearance	mm 290
Engine	Model	Kubota D1703-M-E3-BH-11
	Total displacement	cc 1647
	Rated output SAE J1995 gross	kW (HP) / rpm 20.5 (27.5) / 2200
Working range	Max. digging height	mm 4250
	Max. dumping height	mm 2865
	Max. digging depth	mm 2820
	Max. vertical wall digging depth	mm 2290
	Max. digging radius	mm 4905
	Boom swing (left/right)	deg 70 / 48
	Min. turning radius (with swing)	mm 2290 (1845)
	Min. tail turning radius	mm 790
Track type	Max. breakout force (bucket)	kN (kgf) 30.0 (3059)
		Rubber / Steel
Track width	mm	300
Travel section	Crawler length	mm 2100
	Tumbler distance	mm 1665
	Travel speed (1st/2nd gear)	km / h 3.1 / 4.6
	Max. climbing angle	deg 30
Swing speed	rpm	8.8
Blade	Width	mm 1550
	Height	mm 343
	Max. lift above ground/drop below ground	mm 365 / 375
Hydraulic pump type	Variable pump × 2 + gear pump × 1	
Swivel motor type	Hydraulic piston motor	
Travel motor type	Hydraulic piston motor: 2F	
Fuel tank capacity	L	46

● Specifications in this catalog are subject to change without prior notice.

Working Range of U30-6

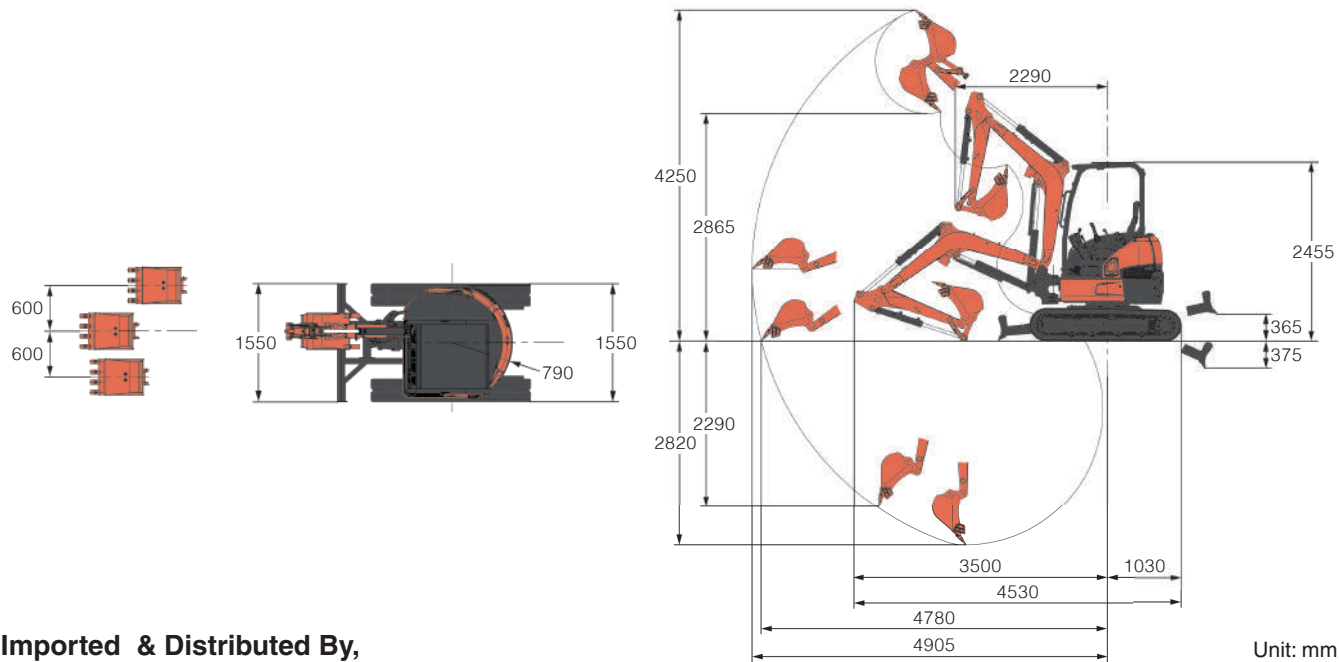

Imported & Distributed By,
Sojitz India Private Limited

Head Office:
7th Floor,
Eros Corporate Tower,
Nehru Place,
New Delhi – 110 019, India.

TEL: +91-11-6642-6400
FAX: +91-11-6642-6401

Chennai Branch Office:
Address: Polyhose Towers,
(SPIC “Annexe Building”)
Door No.86, 8th Floor, Mount Road, Guindy,
Chennai – 600 032, Tamil Nadu, India.

TEL: +91-44-2235-3001/3002
FAX: +91-44-2235-3007
Email: cesales@sojitz.com



AKK1765

U30-6

For Earth, For Life

Kubota

Kubota Mini Excavator

